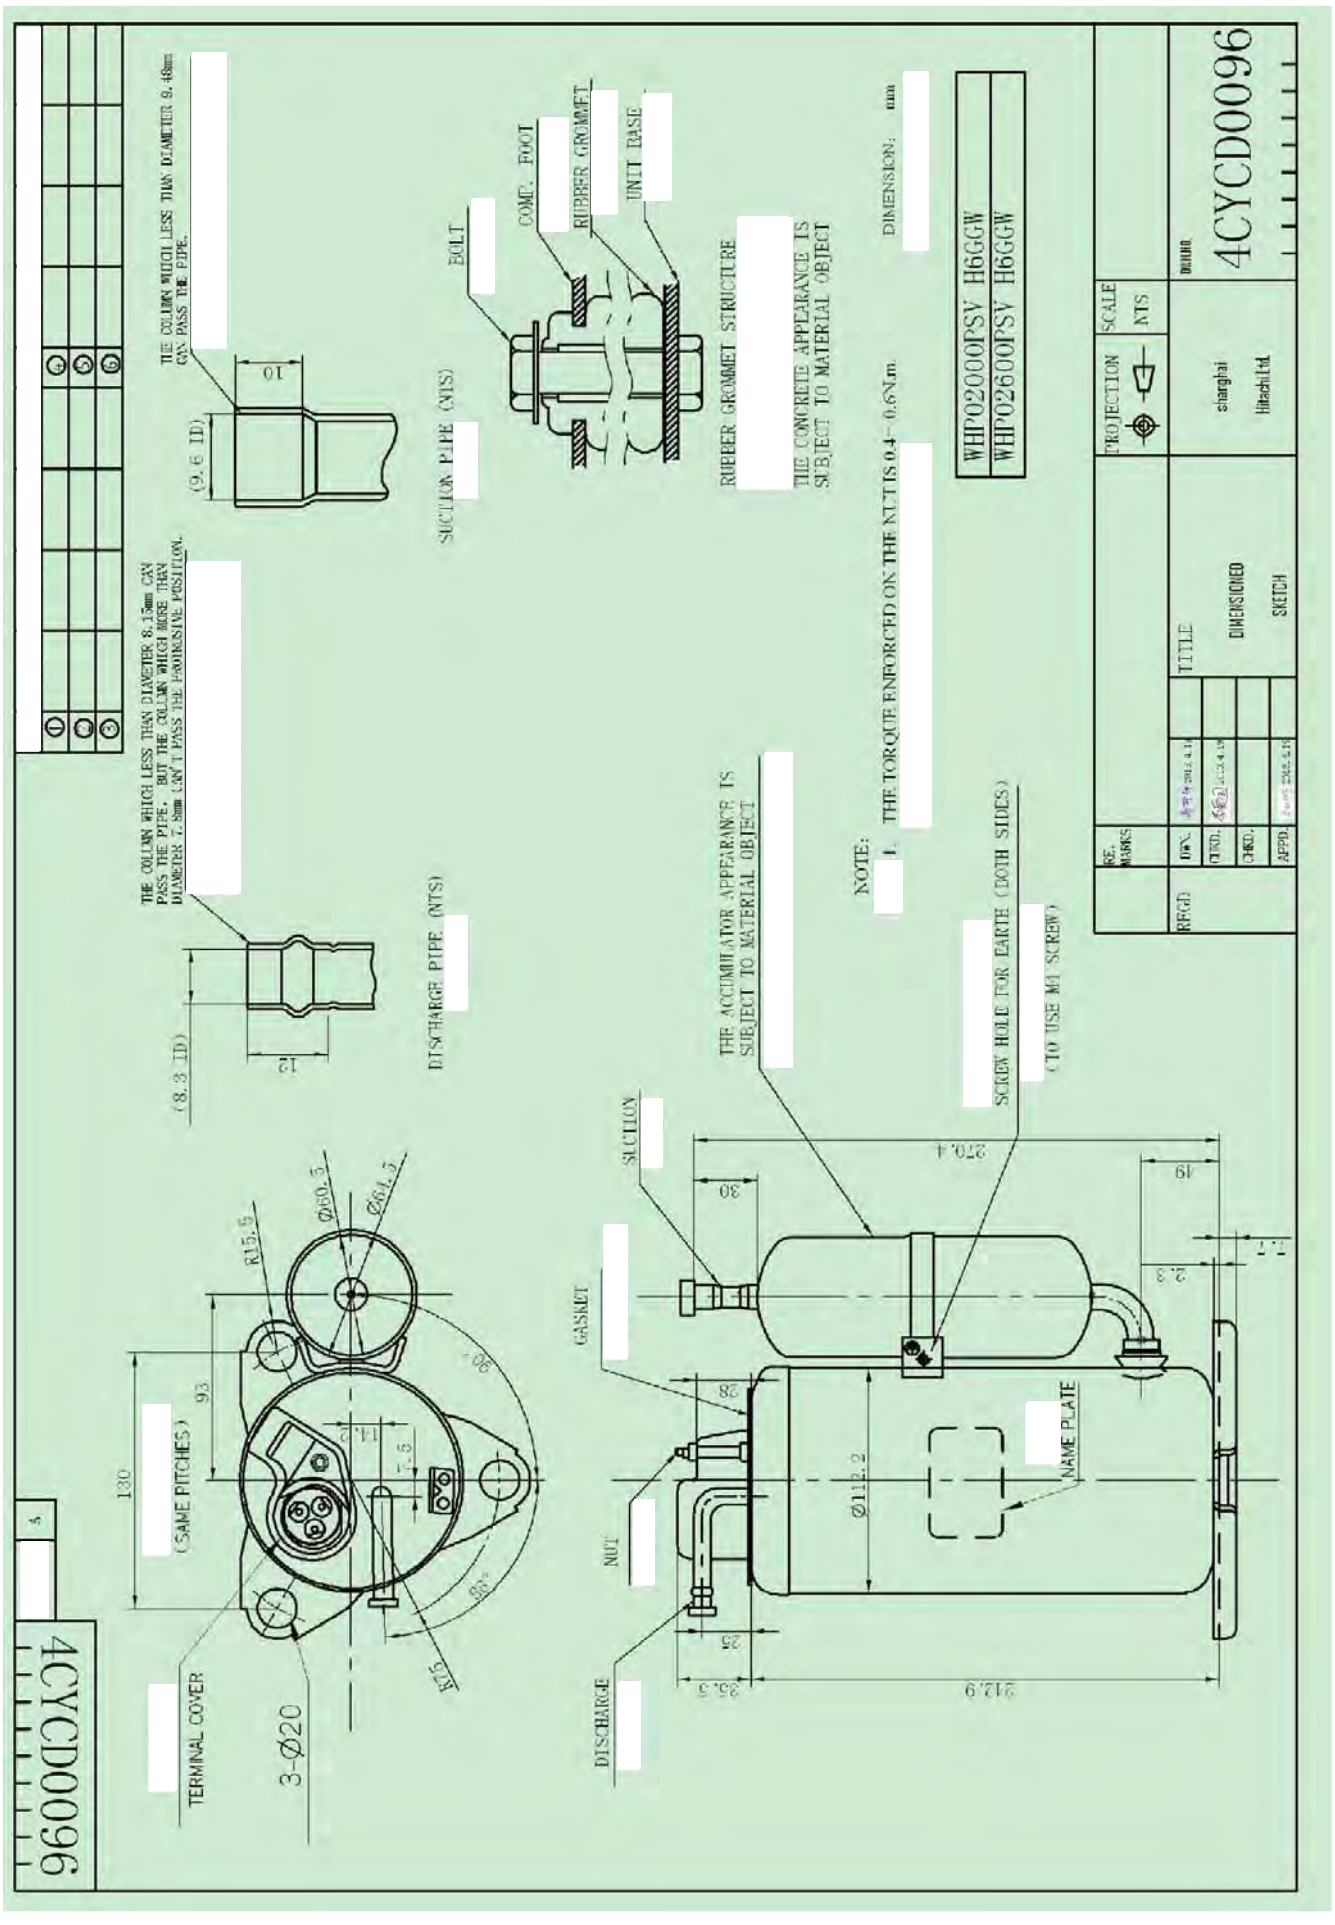
4CYCD0096
WHP02000PSV H6GGW
WHP02600PSV H6GGW
THE TORQUE ENFORCED ON THE NUTIS 0.4 - 0.6N.m.
NOTE:
1.
THE CONCRETE APPEARANCE IS SUBJECT TO MATERIAL OBJECT
RUBBER GROMMET STRUCTURE
UNIT BASE
RUBBER GROMMET
COMP. FOOT
BOLT
SUCTION PIPE (NTS)
DISCHARGE PIPE (NTS)
THE COLUMN WHICH LESS THAN DIAMETER 8.15mm CAN PASS THE PIPE, BUT THE COLUMN WHICH MORE THAN DIAMETER 7.5mm CAN'T PASS THE POSITIVE POSITION.
THE COLUMN WHICH LESS THAN DIAMETER 9.48mm CAN PASS THE PIPE.
(9.6 ID)
(8.3 ID)
10
12
SCREW HOLE FOR EARTH (BOTH SIDES)
(TO USE M4 SCREW)
THE ACCUMULATOR APPEARANCE IS SUBJECT TO MATERIAL OBJECT
SUCTION
GASKET
NUT
DISCHARGE
NAME PLATE
TERMINAL COVER
3-Ø20
(SAME PITCHES)
130
93
R15.5
Ø60.5
Ø61.5
R10
Ø112.2
312.9
35.5
25
88
30
270.4
19
TITLE
DIMENSIONED SKETCH
PROJECTION
SCALE
NTS
shanghai
Hitachi ltd
4CYCD0096